

LUNARAY

LIT 34016

INTENSITY FLEX LED STRIP SERIES

LOW-VOLTAGE 12VDC / 24VDC SYSTEM



7 COLOUR TEMPERATURE OPTIONS

COLOUR RENDERING OVER CRI >80 RA

DIMMABLE WITH LIGHTCRAFT DIMMING DRIVER AND COMPATIBLE DIMMING CONTROLLER (TO BE ORDERED SEPARATELY)

I-10V, DALI AND DMX CONTROL OPTIONS (TO BE ORDERED SEPARATELY)

LONG RATED LIFE OF 50,000 HOURS

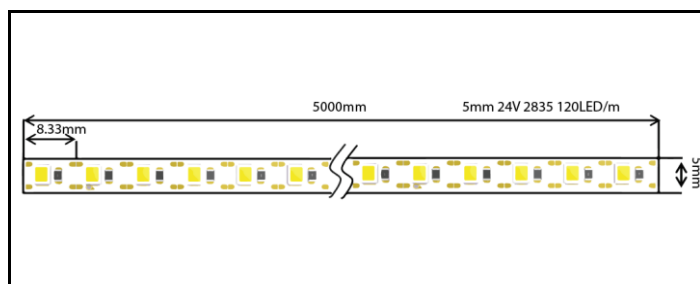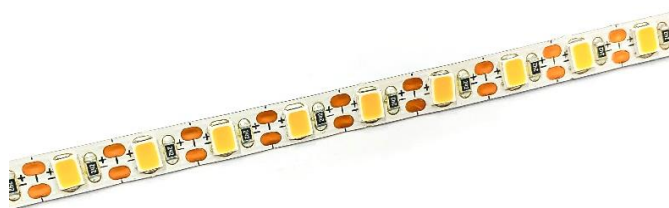

12VDC / 24VDC			
LEDs / METER	120		
LUMEN PER METER	524	1048	2096
STRIP WIDTH (MM)	5		
CUTTABLE LENGTH (MM) 12VDC	25		
CUTTABLE LENGTH (MM) 24VDC	50		
POWER PER METER (W)	5	10	20
IP20	✓	✓	✓

INPUT VOLTAGE	12VDC OR 24VDC
POWER CONSUMPTION	6W - 20W / METER
LED SOURCE	EPISTAR 2835 SMD (>80RA)
	SAMSUNG 2835 SMD (>90RA)
TAPE SUBSTRATE	FLEXIBLE PRINTED CIRCUIT
OPTICS	115° x 115°
STANDARD LENGTH	5,000 MM REEL
BEND RANGE	> R50MM
WARRANTY	24 MONTHS

CONFIGURE THIS PRODUCT

SERIES	VOLTAGE	IP RATING	LEDs / M (PITCH)	LENGTH	CCT	CRI
LIT 34016	DC 12V	IP20 20	120 LEDs (8 MM)	1000 MM	2,400K - 24	>80 RA - 80
	DC 24V			2000 MM	2,700K - 27	>90 RA - 90
				3000 MM	3,000K - 30	
				4000 MM	3,500K - 35	
				5000 MM	4,000K - 40	
				CUSTOM CUS	6,500K - 65	

*EXAMPLE: LIT34015-12V-20-17-1000-30-80