

LUNARAY

LIT 34019

TUNABLE WHITE FLEX LED STRIP SERIES

LOW-VOLTAGE 12VDC / 24VDC SYSTEM



TUNABLE WHITE COLOUR TEMPERATURE (2700K - 6500K)

COLOUR RENDERING OVER CRI >80 RA

DIMMABLE WITH LIGHTCRAFT DIMMING DRIVER AND COMPATIBLE DIMMING CONTROLLER (TO BE ORDERED SEPARATELY)

DALI AND DMX CONTROL OPTIONS (TO BE ORDERED SEPARATELY)

LONG RATED LIFE OF 50,000 HOURS

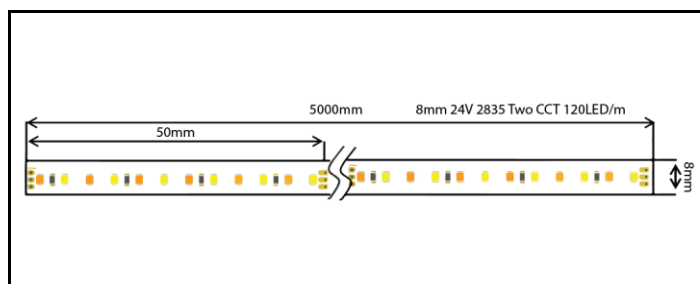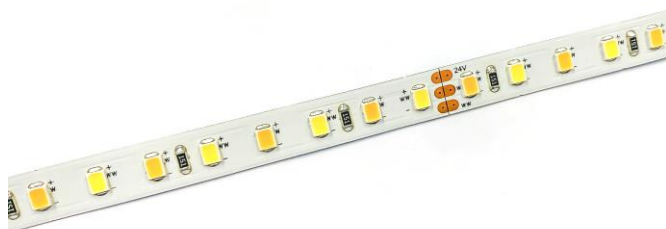

INPUT VOLTAGE	12VDC OR 24VDC
POWER CONSUMPTION	6W - 24W / METER
LED SOURCE	EPISTAR 2835 SMD (>80RA)
	SAMSUNG 2835 SMD (>90RA)
TAPE SUBSTRATE	FLEXIBLE PRINTED CIRCUIT
OPTICS	115° x 115°
STANDARD LENGTH	5,000 MM REEL
BEND RANGE	> R50MM
WARRANTY	24 MONTHS

12VDC / 24VDC			
LEDs / METER		120	
LUMEN PER METER	630	1260	2520
PITCH (MM)		8	
STRIP WIDTH (MM)		8	
CUTTABLE LENGTH (MM) 12VDC		25	
CUTTABLE LENGTH (MM) 24VDC		50	
POWER PER LED	0.2	0.2	0.2
POWER PER METER (W)	6	12	24
IP20	✓	✓	✓
IP65	✓	✓	✓
IP68	✓	✓	✓

CONFIGURE THIS PRODUCT

SERIES	VOLTAGE	IP RATING	LEDs / M (PITCH)	LENGTH	CCT	CRI
LIT 34019	DC 12V	IP20 20	120 LEDs (8 MM)	1000 MM	2,700K-6,500K - TW	>80 RA - 80
	DC 24V	IP65 65		2000 MM		>90 RA - 90
		IP68 68		3000 MM		
				4000 MM		
				5000 MM		
				CUSTOM CUS		

*EXAMPLE: LIT34019-12V-20-17-1000-TW-80